

Master 2.39.0

Released 16.12.2024

New features

1. Seats ventilation control added

GEN7 GEN7(V2) E96(V2) S96(V2)

In channels and CAN settings:

Channels and CAN

General settings

Remote start

Autostart

Engine blocking

Flexible logic

Telematics

RESET CHANNELS

Start preheater by analog signal

Steering column blocking (SLP)

Security status

Arkan radio modem

Dashcam power relay control

Steering wheel heater

Windows and mirrors heater

Seats heater

Seats ventilation

Starter

Immoblizer data bypass (iKey)

Steering wheel heater

Seats heater

Seats ventilation

Windows and mirrors heater

Horn control

Low beam switch Off

In smart comfort settings:

Channels and CAN

General settings

Remote start

Autostart

Engine blocking

Flexible logic


Telematics

Seats heater

Seats ventilation

Climate control temperature


In Flexible Logic settings:

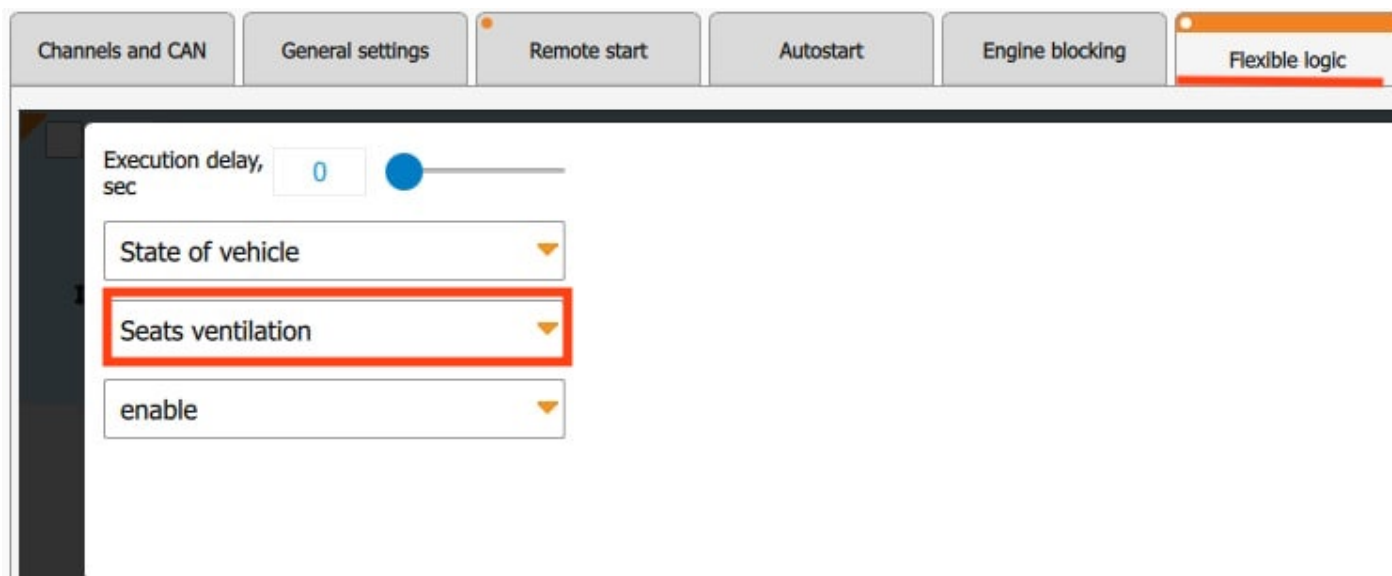

2. Support for A100 parking heater added

GEN7 GEN7(V2) E96(V2) S96(V2) M66(V2)

Control of the A100 HYDRO ECO parking heater autostart, version 2, have been added via digital bus. The connection between timer and preheater is made in parallel to the yellow wire (UART).

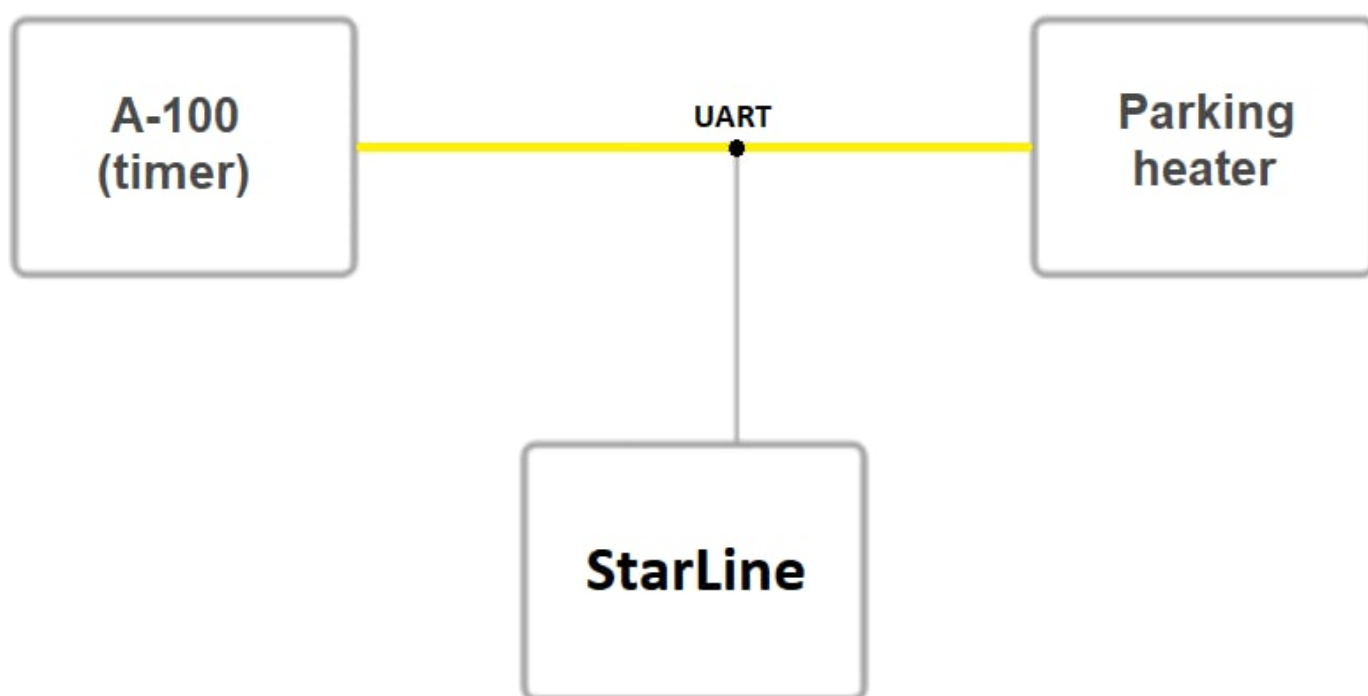



You can use the white-black or any free LIN wire to connect. Switch it to a digital channel.


Set "A100 parking heater control via data bus" function to the selected channel in "StarLine Master".


Select "Control parking heater" (preheater) parameter in "Parking heater (preheater)" section of Remote Start tab. Set "A100 via digital bus" for the "Start type of preheater" parameter.

Example of settings:

9.  gray-white

10.  white

11.  white-dark blue

12.  white-green

☐ Not set

☐ Webasto preheater control via data bus

☒ A100 preheater control via data bus

☐ Eberspächer preheater control via data bus

Channels and CANGeneral settingsRemote startAutostartEngine blockingFlexible logicTelematics

Parking heater (preheater)

Control parking heater (preheater)

Start type of preheaterA100 via digital bus

Fixed bugs

2.X.X GEN7(V2) Statuses reading and control via CAN stopped working when engine was started on vehicles, mainly Chinese brands, until unit was restarted.

Known bugs

No